


Market Leader in ThermoTechnology

The patented FERROPLAST® panels

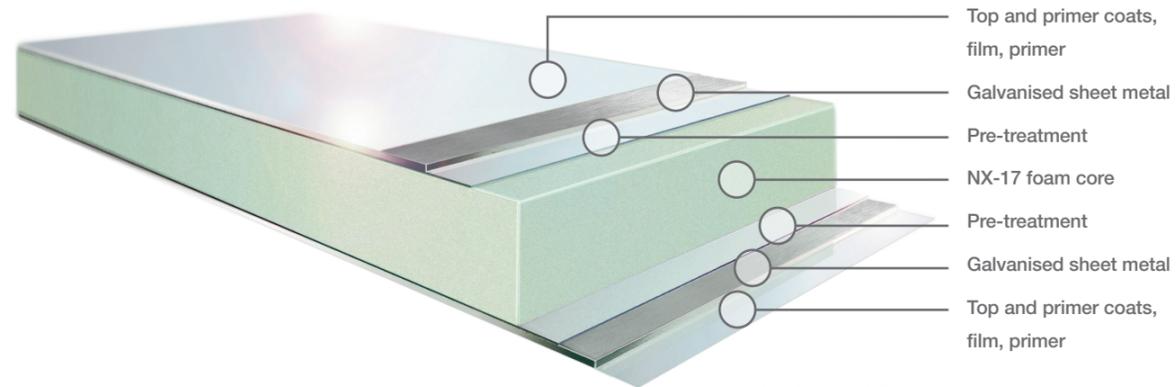

Patented in 1978 Schmitz Carobull's FERROPLAST® panel technology has quickly become the market leader all across Europe. Ferroplast bodies combine the increased insulation properties of NX-17 polyurethane hard foam with durable steel skins.

- No water ingress into the panels no weight gain over time.
- Low heat storage capacity faster pull-down times.
- Age resistant steel covering skins never get brittle.
- Easy repairs low cost and more uptime.



Schmitz Carobull Pty Ltd · 221 Browns Road · Noble Park VIC 3174
Tel: 1300 272 899 · E-mail: trailers@cargobull.com.au · www.cargobull.com/au

SCHMITZ
CARGOBULL
AUSTRALIA



S.KO COOL refrigerated semi-trailer

Australia's most efficient refrigerated trailer

Advantages at glance:

- Superior thermal qualities
- Cost-efficient
- Easy to repair
- Energy-efficient
- Easy to clean
- Age-resistant
- Vapour diffusion-tight



S.KO-COOL-FLY-DEDAUG-9692-1119 We reserve the right to make changes. Some illustrations with special fittings.



Insulated roller door. (Optional)




Four lip door seals perfectly protect the trailer from the loss of cold.



The air circulation wall on the front bulkhead ensures an energy-efficient flow of air. **Flexible cooling ducts** for the distribution of cold air. (Optional)



Multi Temp Zones with exact temperature settings. (Optional)

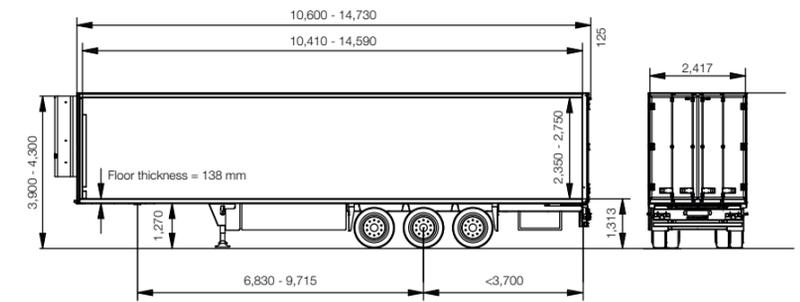

S.KO COOL refrigerated semi-trailer

Standard features:

- Reinforced forklift rated floor (7.2 t forklift axle load)
- Auto Reset to ride height (> 16 km/h the EBS system resets to its ideal ride height automatically)
- Galvanized bolted sub chassis for extra strength and durability
- ABS, EBS and Roll Stability Program (RSP)
- SAF axles
- Reinforced skid plate (10 mm)


Aftersales and spare parts support:

- 26 trained service and repair partners



Optional extras:

- BPW axles
- Toolbox
- Water tank
- Wheel carrier
- Trailer Information Module (TIM)
- Dynamic Ramp Protection (DRP)

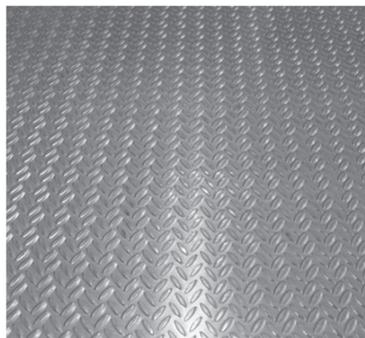

High quality barley seed aluminium floor with 7.2t forklift axle load.



The fully welded all-around kick strip protects the floor from water ingress.



Fully recessed load securing tracks.



The fully recessed double deck system with 1,000 kg payload per beam. (Optional)



The pivoting handle ensures the safe and easy catching of the doors, close to the sidewalls.



The pull-out ladder makes entering the trailer safe and comfortable.